




Type 1:


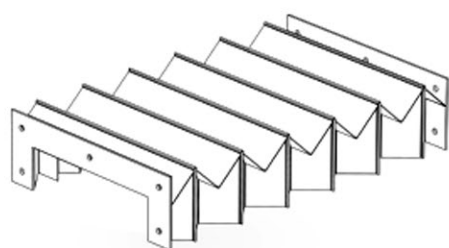


Type 1-A




Type 1-B

Type 2:

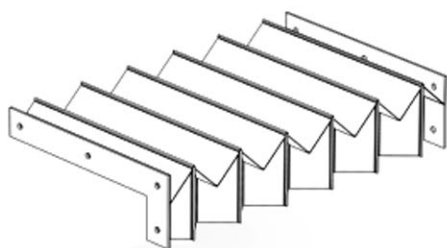


Type 2

Type 3:








Type 3


Type 4:



Type 5:

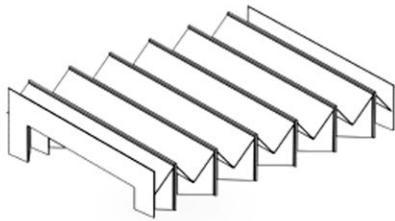

Type 6:

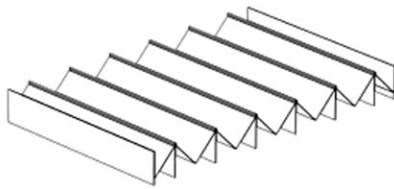

Type of cover (e.g. 1-A) :

Operating position : vertical horizontal cross-rail

Basic dimensions :

Extended length (Lmax) : mm

Compressed length (Lmin) : mm

Width of bellows B : mm

B1 : mm

B2 : mm

Height of bellows H : mm

Height of side H1 : mm

H2 : mm

Fold height FB : mm

Length of side A : mm

A1 : mm

A2 : mm

Operating conditions:

Ambient temperature : °C

Temperature of material falling onto bellows : °C

Protection required against: